

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : RE 39,187 E
APPLICATION NO. : 09/915132
DATED : July 18, 2006
INVENTOR(S) : Jeffrey T. Randall


Page 1 of 3

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Title page, should be deleted and substitute therefor the attached title page.
In the drawings, Sheet 2 of 2 should be replaced with the attached, new sheet 2 of 2 which contains Fig. 4.

Signed and Sealed this

Eleventh Day of December, 2007

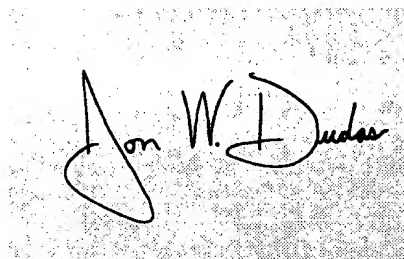A handwritten signature in black ink, reading "Jon W. Dudas", is written over a light gray, textured rectangular background.

JON W. DUDAS
Director of the United States Patent and Trademark Office

(19) **United States**
 (12) **Reissued Patent**
Randall

(10) Patent Number: **US RE39,187 E**
 (45) Date of Reissued Patent: **Jul. 18, 2006**

(54) **SPURT MINIMIZING DISPENSING STRUCTURE**

(75) Inventor: **Jeffrey T. Randall, Oconomowoc, WI (US)**

(73) Assignee: **Seaquist Closures Foreign, Inc., Crystal Lake, IL (US)**

(21) Appl. No.: **09/915,132**

(22) Filed: **Jul. 25, 2001**

Related U.S. Patent Documents

Reissue of:

(64) Patent No.: **5,938,087**
 Issued: **Aug. 17, 1999**
 Appl. No.: **08/877,759**
 Filed: **Jun. 17, 1997**

(51) Int. Cl. **B63D 47/40** (2006.01)

(52) U.S. Cl. **222/547; 222/556; 222/568; 222/571**

(58) Field of Classification Search **222/547, 222/556, 568, 571, 211, 212, 213, 215**
 See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

| | | | |
|---------------|--------|------------------|---------|
| 1,050,192 A | 1/1913 | Wood | |
| 2,834,519 A | 5/1958 | Miller | |
| 2,974,833 A | 3/1961 | Heppenstall | |
| 3,091,373 A * | 5/1963 | Kirschenbaum | 222/420 |
| 3,100,067 A | 8/1963 | Heppenstall | |
| 3,117,701 A * | 1/1964 | Stull | 222/543 |
| 3,207,375 A | 9/1965 | Berezniak et al. | |
| 3,233,798 A | 2/1966 | Abbott | |

| | | | |
|---------------|---------|----------------|------------|
| 3,241,731 A | 3/1966 | Bright et al. | |
| 3,318,496 A | 3/1967 | Ayotte et al. | |
| 3,563,422 A * | 2/1971 | Cruikshank | 222/478 |
| 3,833,150 A * | 9/1974 | Visser-Patings | 222/109 |
| 3,980,211 A * | 9/1976 | Owens | 222/478 |
| 4,427,138 A * | 1/1984 | Heinlein | 222/546 |
| 4,583,668 A * | 4/1986 | Maynard, Jr. | 222/529 |
| 4,811,871 A * | 3/1989 | Wass et al. | 222/477 |
| 5,139,182 A * | 8/1992 | Appia | 222/519 |
| 5,141,138 A * | 8/1992 | Odet et al. | 222/153.07 |
| 5,219,100 A * | 6/1993 | Boek et al. | 222/480 |
| 5,320,260 A * | 6/1994 | Song et al. | 222/547 |
| 5,392,938 A * | 2/1995 | Dubach | 215/254 |
| 5,454,489 A * | 10/1995 | Vesberg | 222/109 |
| 5,497,906 A * | 3/1996 | Dubach | 222/73 |
| 5,531,363 A * | 7/1996 | Gross et al. | 222/494 |
| 5,558,239 A * | 9/1996 | Dubach | 215/235 |
| 5,782,388 A * | 7/1998 | De Nervo | 222/546 |
| 5,850,953 A | 12/1998 | Dallas, Jr. | |
| 6,003,728 A | 12/1999 | Elliot | |

FOREIGN PATENT DOCUMENTS

WO WO 94/20713 * 9/1994 16/227

* cited by examiner

Primary Examiner—J. Casimer Jacyna

(14) Attorney, Agent, or Firm—Wood, Phillips, Katz, Clark & Mortimer

(57)

ABSTRACT

A spurt-resistant spout for a dispensing structure includes (1) an internal tubular portion having a through bore connecting a dispensing orifice of the spout with the interior of the container, and (2) a surrounding wall portion surrounding the tubular portion. The tubular portion and the surrounding wall portion are sized and located so that little or no fluid is retained in and across the spout bore so as to prevent, or minimize, obstruction of the bore.

27 Claims, 2 Drawing Sheets

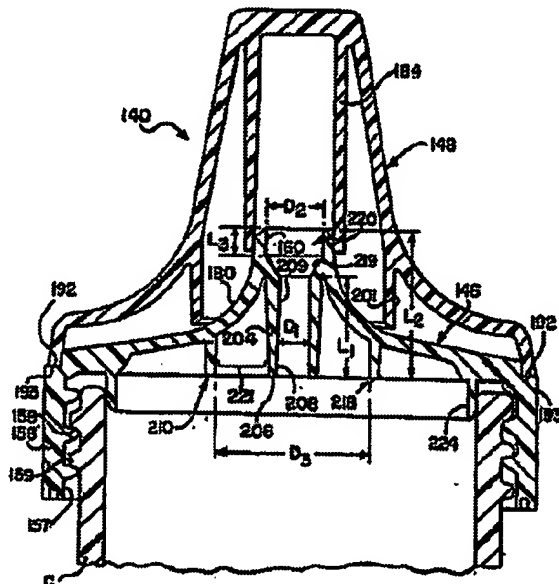


FIG. 3A

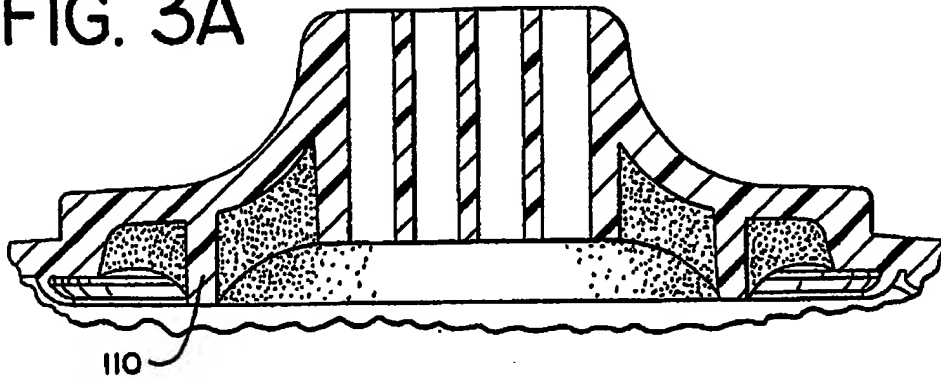


FIG. 4
AMENDED

